



12" Color Touch Screen

CountRite[™] Gusseted Bag Counter

Counts Gummies Into Pre-made Gusseted, Re-sealable Bags



STATION 1

Pouch Magazine & Auto Loading Station

- Conveyor Belt Stack
- Pick Up Arm with Suction Pad
- Pouch Width Adjustment Guide
- Pouch Grippers and Transfer Jaws
- Tooless Size Change-overs
- Holds up to 1,000 bags

STATION 2 – Zipper Opening Station (option)

- Finger & Plunger Systems
- Date Coding Position (option) (Inkjet, Emboss or Heat Transfer)

STATION 3

Pouch Mouth & Bottom Opening Station (option)

- 8 Pneumatic Grippers

STATION 4

Pouch Mouth & Bottom Gusset Opening (option)

905 E. Salter Dr. Phoenix AZ 85024

- Pneumatic Mechanical
- No Bag No Fill Detection

STATION 5 – Fill Station / Counter (option)

- RC60 12 Track Electronic Channel Counter
- Mounted on Raised Platform
- Stand Alone Control Panel with HMI
- 316 Stainless Dimpled Feed Trays
- 316 Stainless Contact Parts

Counting Rate:

- Max. 6,000 pieces per minute (varies depending upon size, shape & surface tension)

Dimensions:

- W526 x D1,270 × H920mm

STATION 6 – Sealing Station

STATION 7

- Sealing & Air Removal
- Sealing Jaw
- 0-300°C Temperature Range
- PID Temperature Control System
- Air Squeeze Station (option)

info@capplustech.com

STATION 8

- **Cooling & Zipper Closing Station**
- Pouch Discharge Conveyor

Options:

- Zipper Opening and Closing System
- Bottom Gusset Pneumatic Opening System
- Product Settling Station
- Bag Air Squeeze Station
- Flat Pouch Opening Device
- Crooked Pouch Detection
- Double Pouch Detection
- Interlocking Plexiglas Covers
- Inkjet Printer
- RC60 Channel Counter
- Bulk Elevator Feeder
- Desiccant Inserter (.5~2gm)
- Nitrogen Purge System

623-582-2800


www.capplustech.com

MKTG 2023-0831 CountRite™ Gusseted Bag Counter

Copyright © 2023 CapPlus Technologies Inc | All rights reserved.





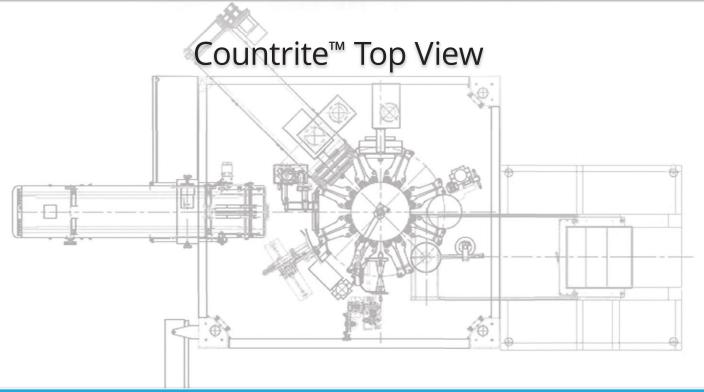

S P E C I F I C A T I O N S

Speed: 35-50 Pouches per Minute Maximum	Controls:	12" Color Touch Screen	Construction:
Standard Bag Size Range: - Width: 100~240mm -Length: 150~350mm	Drive:	Variable Speed Rotary Index Drive	- Polycarbonate Upper Doors (×4) - 304 Stainless Lower Panels - Polyurethane Coated Steel Frame
	Lubrication:	Auto Lube System	
	Power:	230V / 3ph / 60Hz	Weight: 2,800kg
	Dimensions:	5,255 x 2,408 x 2,867mm	

info@capplustech.com

623-582-2800